



Technical Information

Heat pumps

OEnoviaPac-C Slim (Oetrocom Easy) OEnoviaPac Slim (MHX-3)

EN

Pressure available at the indoor module outlet


JS

N° ITOE0234-en

10/09/2020


Pressure available at the indoor module outlet, depending on the flow rate, for:

- **OEnoviaPac-C Slim (Oetrocom Easy) - with YONOS PARA RS15-7 PWM 130 pump.**

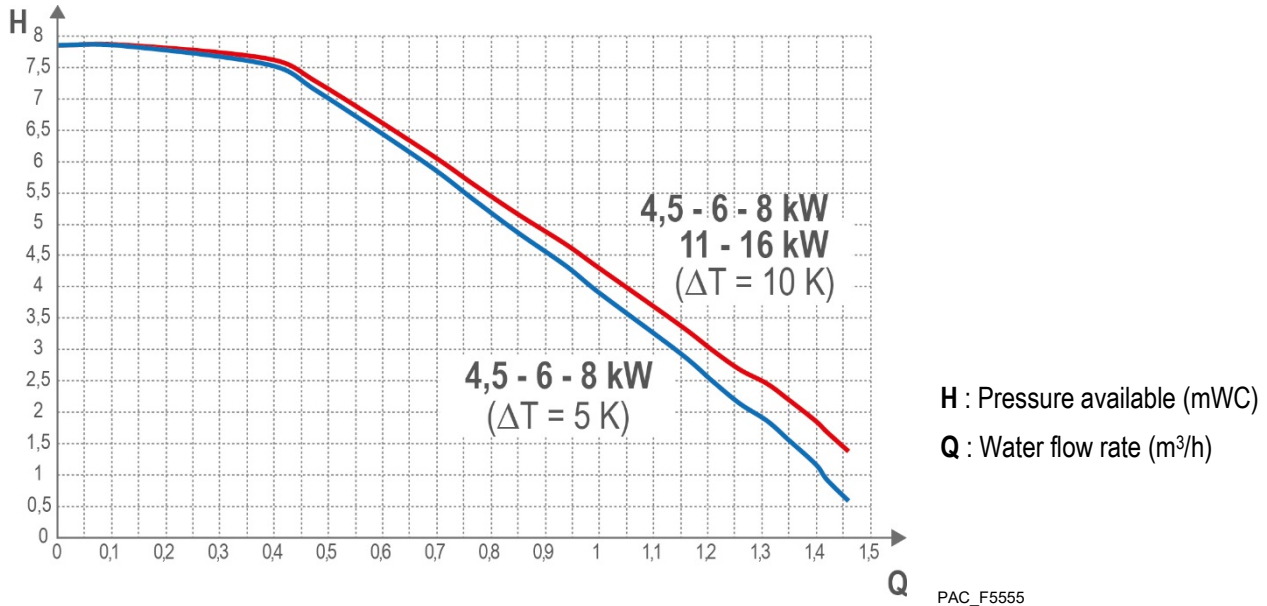

Outdoor unit		ΔT = 5 K			ΔT = 10 K				
		4,5 kW	6 kW	8 kW	4,5 kW	6 kW	8 kW	11 kW	16 kW
Water flow rate	m ³ /h	0,80	0,99	1,42	0,40	0,50	0,71	0,98	1,27
	l/min	13	17	24	7	8	12	16	21
Pressure available	mWC	5,30	3,98	0,94	7,65	7,15	5,95	4,50	2,70
	mbar	520	390	92	750	701	583	441	265

▪ **OEnoviaPac Slim (MHX-3) - with YONOS PARA RS25-6-130* pump**

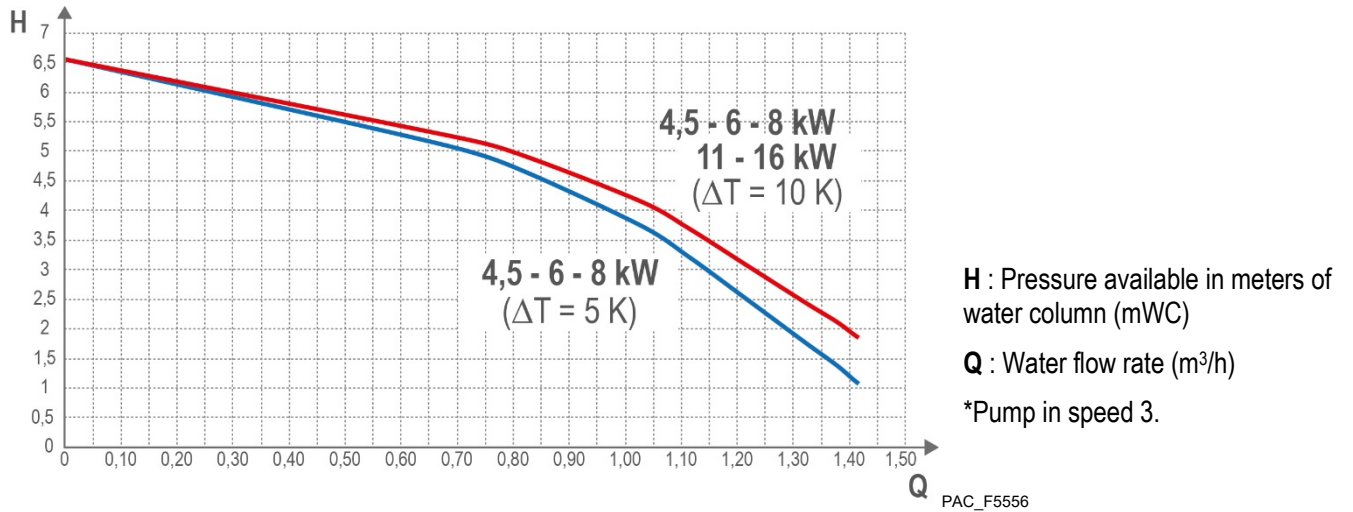

Outdoor unit		ΔT = 5 K			ΔT = 10 K				
		4,5 kW	6 kW	8 kW	4,5 kW	6 kW	8 kW	11 kW	16 kW
Water flow rate	m ³ /h	0,80	0,99	1,42	0,40	0,50	0,71	0,98	1,27
	l/min	13	17	24	7	8	12	16	21
Pressure available	mWC	4,84	3,98	1,12	5,81	5,61	5,15	4,33	2,80
	mbar	475	390	110	570	550	505	425	275